

QUIKRETE®



A PREPARED CEMENT SAND MIX - READY TO USE



ADD ONLY WATER...
MIX TO PLASTIC-LIKE
CONSISTENCY

LABORATORY TESTED
HIGH COMPRESSIVE
STRENGTH

90 LBS. NET
WT.

QUIKRETE

"For filling cracks, patching concrete, topping,
etc. Contents of this bag will cover approx-
imately 9 sq. ft., 1" thick."

MANUFACTURED BY
MAINTENANCE products, inc.
6225 Huntley Road
Worthington, Ohio



*GEMACO AND QUIKRETE ARE TRADE MARKS REG. U. S. PAT. OFF. PROPERTY OF MAINTENANCE PRODUCTS INC.

PRODUCT GUIDE

www.quikrete.com

TABLE OF CONTENTS

■ CONCRETE MIXES	3
■ MORTAR & MASONRY PRODUCTS	4
■ PORTLAND & MASONRY CEMENTS	6
■ CONCRETE REPAIR & WATERPROOFING	7
■ CRACK SEALERS & CAULKS	9
■ POLYURETHANE SEALANTS, ADHESIVES & ANCHORING EPOXIES.....	10
■ SEALERS & ADDITIVES	11
■ CONSTRUCTION & RESTORATION PRODUCTS	13
■ DOT REPAIR MATERIALS	15
■ STUCCO PRODUCTS	16
■ SANDS & AGGREGATES	17
■ HARDSCAPES by QUIKRETE®	19
■ UNDERLAYMENTS & THINSETS	20
■ BLACKTOP PRODUCTS	21
■ DECORATIVE CONCRETE STAINS	22
■ SURFACE PREPARATION	23
■ CONCRETE & MASONRY COATINGS	23
■ FLOOR COATINGS	24
■ CONCRETE ACCESSORIES	25
■ WINTER PRODUCTS	26





**PRODUCTS
THAT LAST
COME FROM
COMPANIES
THAT DO.**

Since 1940, The QUIKRETE® Companies has served the construction and home improvement industries. The QUIKRETE® brand is the most respected and trusted brand of cement and concrete products in the United States.

With more than 100 manufacturing locations throughout the United States, Puerto Rico, Canada, Central and South America, **The QUIKRETE® Companies** is committed to providing reliable, high performance and innovative products for the contractor and homeowner.



WHAT AMERICA'S MADE OF®



CONCRETE MIX

Original 4000 psi average compressive strength blend of Portland cement, sand, gravel or stone, and other approved ingredients. Just add water. **Use For:**

- Floors
- Footings
- Steps
- Sidewalks
- Patios
- Curbs
- Setting Posts

Exceeds the requirements of ASTM C 387

Item No.	Package Size	Metric	Quantity
1101-10	10 lb. bag	4.5 kg	6/bale
1101-40	40 lb. bag	18.1 kg	80/pallet
1101-60	60 lb. bag	27.2 kg	56/pallet
1101-80	80 lb. bag	36.2 kg	42/pallet

* 90 lb. bags available regionally.



FAST-SETTING CONCRETE MIX

A special blend of fast-setting cements, sand and gravel designed to set hard in approximately 20-40 minutes. Use for building and setting posts. Sets posts without mixing. Pour dry mix into hole and soak with water.

- Use For Setting:**
- Fence posts
 - Mailbox posts
 - Swing sets
- Use For Building:**
- Steps
 - Sidewalks
 - Air conditioner pads

Exceeds the requirements of ASTM C 387

Item No.	Package Size	Metric	Quantity
1004-50	50 lb. bag	22.7 kg	64/pallet



QUIKRETE® 5000 CONCRETE MIX

Commercial Grade concrete mix designed for higher-early strength gain. Achieves 2500 PSI in 3 days and 5000 PSI in 28 days. Ideal for cold weather application. **Use For:**

- Concrete projects 2" thick or more that require high strength
- Driveway aprons
- Sign footings
- Patios
- Deck supports
- Curbs
- Floors

Exceeds the requirements of ASTM C 387

Item No.	Package Size	Metric	Quantity
1007-01	60 lb. bag	27.2 kg	56/pallet
1007-00	80 lb. bag	36.2 kg	42/pallet



Q-MAX PRO CONCRETE MIX

Fiber reinforced, rapid hardening concrete formulated to provide a 1-hour working time, a walk-on time of 3 hours, and achieve a compressive strength of 6500 PSI. The mix provides superior workability and finishing characteristics and resists drying shrinkage cracks. Air entrained for improved freeze-thaw durability and contains a corrosion inhibitor to protect reinforced steel.

Item No.	Package Size	Metric	Quantity
1004-81	80 lb. bag	36.2 kg	42/pallet



CRACK RESISTANT CONCRETE MIX

Commercial Grade concrete mix with air entraining admixture, and alkali-resistant reinforcing fibers. Formula significantly reduces cracking from drying shrinkage and is designed for use in structural concrete applications. Achieves 4000 PSI in 28 days. **Other benefits & features include:**

- Superior workability
- Provides greater impact resistance
- Air entrained for improved freeze-thaw durability
- Eliminates the need for wire mesh in typical slab-on-grade slabs

Exceeds the requirements of ASTM C 387

Item No.	Package Size	Metric	Quantity
1006-67	60 lb. bag	27.2 kg	56/pallet
1006-80	80 lb. bag	36.2 kg	42/pallet



COUNTERTOP MIX

A specially formulated flowable high strength concrete mix for use in pre-cast and cast-in-place concrete countertop applications. Available in Gray & Tint-Base White. **Other benefits and features include:**

- High flow formula minimizes the need for mechanical vibration
- Reduced shrinkage formulation
- Strip forms in 18 hours
- Exceeds
 - 2,500 PSI (17.7 MPa) @ 3 days
 - 3,500 PSI (24.1 MPa) @ 7 days
 - 5,000 PSI (34.5 MPa) @ 28 days


Item No.	Package Size	Metric	Quantity
Gray 1106-80	80 lb. bag	36.2 kg	42/pallet
Tint Base White 1106-81	80 lb. bag	36.2 kg	42/pallet

QUIKRETE® Timeline: 1940-2015

May 22, 1940 Maintenance Products Inc - QUIKRETE® Founded

April 1951 Produces first QUIKRETE® branded product: Gemaco QUIKRETE®

August 1954 QUIKRETE® receives US trademark registration





MORTAR MIX

A blend of masonry cement and graded sand. Just add water. **Use for non structural construction & repair of brick, block and stone:**

- Barbecues
- Pillars
- Planters
- Non-structural walls
- Tuck pointing mortar
- Veneers

Meets the requirements of ASTM C 270 & C 1714 for Type N Mortar

Item No.	Package Size	Metric	Quantity
1102-10	10 lb. bag	4.5 kg	6/bale
1102-40	40 lb. bag	18.1 kg	80/pallet
1102-60	60 lb. bag	27.2 kg	56/pallet
1102-80	80 lb. bag	36.2 kg	42/pallet



MASON MIX

High strength, contractor grade, pre-blended mortar mix. Mason Mix contains properly graded masonry sand and requires only the addition of water. **Use for structural & non-structural masonry applications above and below grade:**

- Walls
- Columns
- Brick/stone veneers
- Tuck pointing

Meets the requirements of ASTM C 270 & C 1714

* Also available in 3000 lb. bulk bags

Item No.	Package Size	Metric	Quantity
Type S			
1136-00	60 lb. bag	27.2 kg	56/pallet
1136-80	80 lb. bag	36.2 kg	42/pallet
Type N			
1136-86	80 lb. bag	36.2 kg	42/pallet
Type M			
1136-85	80 lb. bag	36.2 kg	42/pallet



MASON MIX - COLORED FORMULA

High strength, contractor grade, pre-blended mortar mix. Colored Mason Mix contains properly graded masonry sand and color pigment. **Use for structural masonry applications above and below grade:**

- Walls
- Columns
- Brick/stone veneers
- Tuck pointing

• Also available in Type "N" and "M" formulations
Meets the requirements of ASTM C 270 & C 1714

* Contact your local representative for exact color availability.

* Also available in 3000 lb. bulk bags

Item No.	Package Size	Metric	Quantity
Type S			
1136-71	80 lb. bag	36.2 kg	42/pallet
Type N			
1136-72	80 lb. bag	36.2 kg	42/pallet



GLASS BLOCK MORTAR

Specifically formulated blend of white sand, white cement, hydrated lime and waterproofing additives. Just add water.

Use For:

- Laying glass block for interior and exterior walls
- Laying brick, block or tile where white mortar is desired

Meets the requirements of ASTM C 270 & C 1714 for Type S Mortar

Item No.	Package Size	Metric	Quantity
1610-00	50 lb. bag	22.7 kg	63/pallet



VENEER STONE MORTARS

A Portland cement and hydrated lime based mortar designed for veneer applications and tuck pointing of manufactured and natural stone. **Also available in Polymer-Modified and Natural Stone formulas.**

- Apply directly to concrete and masonry surfaces or over expanded metal lath
- Superior bond strength
- Consistent, pre-blended mix

Meets the requirements of ASTM C 270 & C 1714

* Also available in 3000 lb. bulk bags

Item No.	Package Size	Metric	Quantity
1137-80	80 lb. bag	36.2 kg	42/pallet
Poly-Mod			
1137-85	80 lb. bag	36.2 kg	42/pallet
Natural Stone			
1137-88	80 lb. bag	36.2 kg	42/pallet


January 1959 Introduces QUIKRETE® Vinyl Concrete Patcher



January 1967 Introduces Hydra-Hold (Hydraulic Water Stop)



April 1968 Publishes Do-It-Yourself With Packaged Concrete And Mortar Guide



1972





ROOF TILE MORTAR FL-15

Contractor grade, high bond strength mortar. **Use For:**

- Setting flat and low profile clay, cement and other roof tile
- Roofs up to 15 feet high

Meets the requirements of ASTM C 270 for Type M Mortar

Item No.	Package Size	Metric	Quantity
1140-80	80 lb. bag	36.6 kg	42/pallet



CORE-FILL GROUTS

A properly proportioned mixture of Portland cement, graded aggregate, and other ingredients designed to provide a flowable grout, requiring only the addition of water. Available in Fine and Coarse. **Use For:**

- Filling masonry block cores
- Pumped or poured applications
- Use Fine Core-Fill Grout when grout space is less than 4 inches in either direction
- Use Coarse Core-Fill Grout when grout space is greater than 4 inches in either direction

Meets the strength requirements of ASTM C 476

Item No.	Package Size	Metric	Quantity
Coarse			
1585-07	80 lb. bag	36.2 kg	42/pallet
Fine			
1585-08	80 lb. bag	36.2 kg	42/pallet



SELF-CONSOLIDATING CORE-FILL GROUT

A Portland cement based highly fluid grout specifically designed to fill masonry block cores without segregation

Other benefits & features include:

- Eliminates the need for vibrating.
- Can be placed in single lifts up to 12 ft. 8 in. high
- Contains 3/8 in. (9.5 mm) aggregate.
- For use when grout space is greater than 4 in. (100 mm) in both directions.

Meets the requirements of ASTM C 476 at 24-28 in. (600-700 mm) Slump flow

Item No.	Package Size	Metric	Quantity
1585-06	80 lb. bag	36.2 kg	42/pallet

September 1974 First national QUIKRETE® ad: The Turnover Twins



1977



20th Plant

January 1977
Introduces QUIKWALL
Surface Bonding Cement





PORTLAND CEMENT

Mixed with aggregate and other ingredients to make concrete mix, mortar mix and base coat stucco. Available in Type I, Type I/II, Type II and Type III.

To make Concrete Mix:

- 3 Parts Gravel
- 2 Parts All-Purpose Sand
- 1 Part Portland Cement (by volume)

To make Type S Mortar Mix:

- 3½ to 4½ Parts Masonry Sand
- ½ Part Hydrated Lime
- 1 Part Portland Cement (by volume)

Meets the requirements of ASTM C 150 and Federal Specifications for Portland cement.

Item No.	Package Size	Metric	Quantity
1124-31	31 lb. bag	14.1 kg	100/pallet
1124-47	47 lb. bag	21.3 kg	63/pallet
1124-94	94 lb. bag	42.6 kg	35/pallet
1124-42	92.6 lb. bag	42 kg	35/pallet



MASONRY CEMENT

Available in Type N and Type S masonry cement.

To make Type N Mortar Mix:

- 3 Parts Masonry Sand
- 1 Part Type N Masonry Cement (by volume)

To make Type S Mortar Mix:

- 3 Parts Masonry Sand
- 1 Part Type S Masonry Cement (by volume)

Meets the requirements of ASTM C 91 and Federal Specifications for masonry cement.

Item No.	Package Size	Metric	Quantity
Type S			
1125-71	70 lb. bag	31.7 kg	40/pallet
Type N			
1125-70	70 lb. bag	31.7 kg	40/pallet



PORTLAND-LIME CEMENT

Blend of Portland cement and hydrated lime meeting the Type S proportions.

Available Regionally.

To make Type S Mortar Mix:

- 2½ to 3 Parts Masonry Sand
- 1 Part Portland-Lime Cement (by volume)

Meets the requirements of ASTM C 91 and Federal Specifications for masonry cement.

Item No.	Package Size	Metric	Quantity
1125-21	70 lb. bag	31.7 kg	40/pallet



PREMIUM PLASTERING CEMENT

Properly proportioned blend of Portland cement with air entraining and plasticized admixtures for use in base coat and finish coat mixes. Formulation provides improved workability, reduced shrinkage and low-sag characteristics.

Available Regionally.

Meets the requirements of ASTM C 91 and Federal Specifications for masonry cement.

Item No.	Package Size	Metric	Quantity
1125-98	94 lb. bag	42.6 kg	35/pallet



STUCCO CEMENT

Blended cement designed for use with plaster sand to make base coat stucco and finish coat stucco mixes.

Available Regionally.

To make base coat stucco mix:

- 3-4 parts plaster sand (ASTM C 897)
- 1 part stucco cement (by volume)

Meets the requirements of ASTM C 91

Item No.	Package Size	Metric	Quantity
1201-85	80 lb. bag	36.2 kg	42/pallet



PLASTIC CEMENT

Blended cement specifically designed for use with plaster sand to make Base Coat Stucco. Available Regionally.

To make Scratch and Base Coat Stucco Mix:

- 3 to 4 Parts Plaster Sand
- 1 Part Plastic Cement (by volume)

Meets the requirements of ASTM C 1328 Type M and S.

Item No.	Package Size	Metric	Quantity
2121-94	94 lb. bag	42.6 kg	35/pallet

May 1980 Introduces color-coded pails for QUIKRETE® Repair Products

1981

June 1982 First QUIKRETE® Profit Manual



30th Plant



CONCRETE REPAIR & WATERPROOFING



CONCRETE RESURFACER

A special blend of Portland cement, sand, polymer modifiers and other additives. Designed to provide a shrinkage compensated repair material for making thin repairs to sound concrete in need of surface renewal. Can be squeegee, trowel or brush applied. **Use For:**

- Sidewalks
- Driveways
- Floors
- Pool decks
- Patios
- Curbs
- Concrete floors
- Parking decks

Item No.	Package Size	Metric	Quantity
1131-20	20 lb. pail	9.1 kg	60/pallet
1131-40	40 lb. bag	18.1 kg	64/pallet
1131-40	40 lb. bag	18.1 kg	35/mini pallet
1131-80	80 lb. bag	36.2 kg	42/pallet



SAND/TOPPING MIX

Consists of a uniformly blended mixture of Portland cement, graded sand and other approved ingredients.

Use For:

- Repairing and topping damaged concrete surfaces less than 2 inches thick
- As a base for laying flagstone and paving bricks

Item No.	Package Size	Metric	Quantity
1103-10	10 lb. bag	4.5 kg	6/bale
1103-40	40 lb. bag	18.1 kg	80/pallet
1103-60	60 lb. bag	27.2 kg	56/pallet
1103-80	80 lb. bag	36.2 kg	42/pallet



VINYL CONCRETE PATCHER

Multi-purpose concrete repair material with strong adhesive properties. Trowels to a feather edge of 1/16". Made of a special blend of exterior grade vinyl resin, fine sand, and Portland cement. Just add water. Available in gray and white.

Use For:

- Making smooth repairs to cracked or chipped concrete floors, sidewalks or steps

Item No.	Package Size	Metric	Quantity
1133-11	10 lb. pail	4.5 kg	4/case
1133-20	20 lb. pail	9.1 kg	60/pallet
1133-40	40 lb. bag	18.1 kg	64/pallet
1133-40	40 lb. bag	18.1 kg	35/mini pallet



QUICK-SETTING CEMENT

Specially formulated to set in approximately 10–15 minutes. Can be molded or sculpted into place. **Use For:**

- Making concrete repairs where rapid setting is required
- Ideal for repairing broken edges of concrete steps and curbs

Item No.	Package Size	Metric	Quantity
1240-11	10 lb. pail	4.5 kg	4/case
1240-20	20 lb. pail	9.1 kg	60/pallet
1240-50	50 lb. bag	22.7 kg	64/pallet



ANCHORING CEMENT - EXTERIOR USE

A pourable rapid setting expansive cement that develops strength greater than concrete. Sets in 10-30 minutes. Expands as it hardens to fill voids and lock itself securely into place. Suitable for wet environments. **Use For:**

- Setting bolts, handrails, or anything metal to be anchored in concrete
- Ideal for repairing loose wrought iron railings
- Can be used for interior or exterior applications

Item No.	Package Size	Metric	Quantity
1245-11	10 lb. pail	4.5 kg	4/case
1245-20	20 lb. pail	9.1 kg	60/pallet
1245-60	50 lb. pail	22.7 kg	64/pallet

1984



40th Plant

August 1985 Secures Don Knotts as spokesperson. Publishes *Build & Repair With Concrete*



March 1988 Introduces Fast-Setting Concrete Mix





HYDRAULIC WATER-STOP CEMENT

Rapid setting, high strength repair material designed to plug leaks instantly in concrete and masonry. Sets in 3-5 minutes and can be used above and below grade. **Use For:**

- Blocking running water or leaks in cracked masonry or concrete surfaces
- Can be used on swimming pools, foundations and for sealing around concrete pipe

Item No.	Package Size	Metric	Quantity
1126-11	10 lb. pail	4.5 kg	4/case
1126-20	20 lb. pail	9.1 kg	60/pallet
1126-50	50 lb. pail	18.1 kg	64/pallet
White			
1126-15	10 lb. pail	4.5 kg	4/case



ZIP & MIX - REPAIR MORTAR

Polymer modified fast-setting repair mortar in a new zip closure pouch. Add water directly to the pouch, zip the pouch closed and knead the bag for 3 minutes, then apply right out of the pouch. **Use For:**

- Vertical or horizontal repairs to concrete and masonry surfaces from 1/8" to 2" thick.

Item No.	Package Size	Metric	Quantity
1241-15	3 lb. bag	1.36 kg	12/case



CONCRETE PATCHING COMPOUND

Pre-mixed, ready to apply, acrylic patching compound for non-structural repairs to concrete and masonry surfaces. Use for patches up to 1/4" thick. No mixing required. **Use for:**

- Sidewalks
- Walkways
- Steps
- Patios

Item No.	Package Size	Metric	Quantity
8650-35	1 qt. pail	.95 L	12/case



HEAVY DUTY MASONRY COATING

A powdered mixture of Portland cement, waterproofing agents and sand used to seal and beautify concrete, block, brick, stucco, and stone walls. Can be used in both interior and exterior applications both above grade and below. Available in white and gray. **Use For:**

- Basement walls
- Retaining walls
- Ponds
- Swimming pools

Item No.	Package Size	Metric	Quantity
White			
2401-20	20 lb. pail	9.1 kg	60/pallet
1301-40	40 lb. bag	18.1 kg	63/pallet
Gray			
2402-20	20 lb. pail	9.1 kg	60/pallet
1312-40	40 lb. bag	18.1 kg	63/pallet



MULTI-PURPOSE CONCRETE RESURFACER

Polymer modified Portland cement based trowel applied repair material designed to provide a new, durable and wear resistant surface over worn or scaling concrete. Ideal for resurfacing large areas. **Use for:**



- Sidewalks
- Patios
- Loading docks
- Steps
- Driveways
- Traffic barriers
- Ramps
- Floors

Item No.	Package Size	Metric	Quantity
1131-45	40 lb. bag	18.1 kg	64/pallet

April 1988 Runs first national TV ads with Don Knotts featuring Fast-Setting Concrete and The QUIKRETE® Concrete Repair Center

January 1991 Introduces Gray Concrete Crack Seal & Fiber-Reinforced Concrete

January 1992 Introduces QUIKRETE® 5000, Mason Mix & WALKMAKER





CONCRETE CRACK SEAL

A uniformly blended latex emulsion, specially designed to adhere to all concrete surfaces. No mixing is required. Just pour from the bottle. Blends in with the natural color of concrete. **Use For:**

- Repairing cracks in concrete sidewalks, patios and driveways

Item No.	Package Size	Metric	Quantity
8640-15	5.5 oz. tube	163 mL	12/case
8640-00	1 qt. bottle	946 mL	12/case
8640-01	1 gal. bottle	3.8 L	4/case



CONCRETE REPAIR

A weather-resistant, sanded acrylic and flexible crack-filler and sealer. Helps prevent water and ice damage to concrete & masonry surfaces. Dries to a textured finish to blend with surrounding surface. Apply with standard caulking gun for 10 oz. size. **Use For:**

- Repairing cracks in concrete, masonry and stucco
- Ideal for vertical surfaces

Item No.	Package Size	Metric	Quantity
8620-13	5.5 oz. tube	163 mL	12/case
8620-10	10 oz. tube	296 mL	12/case



MORTAR REPAIR

A sanded acrylic formula that adheres to brick, block, stone and concrete surfaces. Texture and color blends with the surrounding mortar. On the 10 oz. caulk tube the square applicator tip is designed to smooth mortar joints.

Use For:

- Tuck-pointing and sealing mortar joints

Item No.	Package Size	Metric	Quantity
8620-05	5.5 oz. tube	163 mL	12/case
8620-09	10 oz. tube	296 mL	12/case



STUCCO REPAIR

Fills and seals cracks in stucco up to 1/2" (12 mm) wide. Weather resistant formula provides excellent adhesion and flexibility. Sanded acrylic formula blends with the texture of the surrounding stucco surface. **Use For:**

- Vertical or horizontal stucco repair applications

Item No.	Package Size	Metric	Quantity
8650-05	5.5 oz. tube	163 mL	12/case
8650-10	10 oz. tube	296 mL	12/case



BLACKTOP REPAIR

A weather-resistant crack-filler, provides excellent adhesion and minimal shrinkage. Helps prevent water and ice damage to blacktop surfaces. Dries to a textured black finish. Non-flammable. **Use For:**

- Repairing cracks in blacktop and asphalt surfaces including driveways, roofs and chimney flashings

Item No.	Package Size	Metric	Quantity
8630-15	5.5 oz. tube	163 mL	12/case
8630-10	10 oz. tube	296 mL	12/case



FIREPLACE REPAIR MORTAR

A silicate based refractory cement caulk for tuck-pointing damaged fireplace mortar joints and repairing cracked or chipped firebricks in fireplaces and wood-burning stoves.

It provides superior adhesion and withstands temperatures of 2000° F (1093° C). **Use For:**

- Tuck-pointing damaged fireplace mortar joints and repairing cracked or chipped firebricks

Meets the requirements of ASTM E 136

Item No.	Package Size	Metric	Quantity
8620-21	10 oz. tube	296 mL	12/case

1992



January 1993 Introduces
QUIKRETE® 1-800 consumer hotline

October 1994 Introduces
Concrete Project Instruction Center





POLYURETHANE SELF-LEVELING SEALANT

High performance, commercial grade, polyurethane sealant, used for sealing cracks and joints in horizontal concrete surfaces. Self leveling formula provides superior adhesion, flexibility and durability. Meets ASTM C 920 Type S, Grade P, Class 25. Available in gray or sandstone.

Use For:

- Sealing expansion joints in concrete slabs
- Sealing cracks in concrete floors, driveways, patios, steps, basements and pool decks

Item No.	Package Size	Metric	Quantity
Gray			
8660-10	10.1 oz. tube	300 mL	12/case
8660-30	29 oz. tube	858 mL	6/case
Sandstone			
8660-31	29 oz. tube	858 mL	6/case



POLYURETHANE NON-SAG SEALANT

High performance, commercial grade polyurethane sealant designed for vertical and overhead surfaces. The non-sag formula provides superior adhesion and flexibility. Meets ASTM C 920, Type S, Grade NS.

Use For:

- Expansion joints in concrete wall panels and stucco walls
- Sealing around window and door openings
- Sealing cracks in concrete, stucco and masonry surfaces

Item No.	Package Size	Metric	Quantity
8660-11	10.1 oz. tube	300 mL	12/case



POLYURETHANE CONSTRUCTION ADHESIVE

High performance, commercial grade adhesive designed for permanently bonding concrete, brick, marble, stone, wood, glass, aluminum, steel, PVC and tile.

Use For:

- Repairing broken concrete
- Bonding retaining wall block and caps

Item No.	Package Size	Metric	Quantity
9902-10	10.1 oz. tube	300 mL	12/case
9902-11	29 oz. tube	858 mL	6/case



POLYURETHANE CONCRETE CRACK SEALANT

Commercial grade polyurethane sealant for permanently sealing and waterproofing cracks in concrete, masonry and stucco surfaces. The textured, non-sag formula blends with the surrounding surface. Dries to a firm, flexible consistency. Use on vertical and horizontal applications

Item No.	Package Size	Metric	Quantity
8620-17	10.1 oz. tube	300 mL	12/case



POLYURETHANE MORTAR JOINT SEALANT

Commercial grade polyurethane sealant for sealing, waterproofing and tuck-pointing damaged and deteriorating mortar joints. The textured, matte-finish non-sag formula blends with surrounding mortar joints. Dries to a firm, flexible consistency.

Item No.	Package Size	Metric	Quantity
8620-18	10.1 oz. tube	300 mL	12/case



ANCHORING EPOXY

A two component, high modulus, non-sag, gray, structural epoxy. Anchoring Epoxy is solvent free, low odor, high strength and moisture insensitive. FastSet Anchoring Epoxy is suitable for vertical or horizontal applications with a working time of 4-5 minutes. High Strength Anchoring Epoxy is suitable for horizontal applications with a working time of approximately 20 minutes.

Use For:

- Anchoring bolts, threaded rods, tie bars and rebar dowels into concrete and masonry substrates.
- Bonding raised reflective pavement markers to concrete or asphalt.

Item No.	Package Size	Metric	Quantity
FastSet			
8620-30	8.6 oz. tube	255 mL	12/case
High Strength			
8620-31	8.6 oz. tube	255 mL	12/case



BACKER ROD

Foam rope used to partially fill large cracks, gaps and joints before applying sealant. Use for horizontal and vertical applications. Available in 3/4" diameter in 20 foot lengths.

Item No.	Package Size	Metric	Quantity
6917-42	3/4" diameter 20' long	19.1 mm x 6 M	12/case

January 1994 Introduces
Liquid Cement Colors



1995



60th Plant

January 1995 Introduces
Acrylic Concrete Cure & Seal



January 1996
Introduces
bilingual packaging



CONCRETE & MASONRY WATERPROOFING SEALER - NATURAL LOOK

Water based, penetrating, silane/siloxane sealer waterproofs and protects concrete, brick, masonry, pavers and stucco surfaces. Clear sealer does not change the surface appearance. Seals from water, salts and oils. UV Resistant. Interior or exterior use. Wait 30 days before applying to new concrete surfaces.

Use for sealing:

- Driveways
- Patios
- Stucco
- Walls
- Sidewalks
- Pavers
- Steps
- Floors
- Bricks

Item No.	Package Size	Metric	Quantity
8800-05	1 gal. bottle	3.8 L	4/case
8800-07	5 gal. pail	18.9 L	36/pallet



CONCRETE & MASONRY HIGH GLOSS SEALER - WET LOOK

Water based siliconized-acrylic clear sealer waterproofs, protects and enhances the color of concrete, masonry, brick, paver and natural stone surfaces. Seals from acids, grease, food stains, oil, salt and more. UV resistant. Interior or exterior use. Wait 30 days before applying to new concrete surfaces.

Use for Sealing:

- Decorative concrete
- Exposed Aggregate
- Floors
- Pavers
- Brick
- Steps
- Natural Stone
- Stucco

Item No.	Package Size	Metric	Quantity
8800-06	1 gal. bottle	3.8 L	4/case
8800-08	5 gal. pail	18.9 L	36/pallet



ACRYLIC CONCRETE CURE & SEAL - SATIN FINISH

Water based, clear acrylic coating cures freshly placed concrete and seals concrete and masonry surfaces.

Features and benefits include:

- Eliminates the need for water curing freshly placed concrete.
- Protects and seals from acids, grease, oils, food stains, salt and more.

Meets the requirements of ASTM C 309

Item No.	Package Size	Metric	Quantity
8730-02	1 gal. bottle	3.8 L	4/case
8730-03	5 gal. pail	18.9 L	36/pallet



CONCRETE BONDING ADHESIVE

Permanently bonds new concrete, plaster, and stucco to existing concrete, plaster or stucco. Eliminates the need for roughing the surface before the application.

Use For:

- Bonding applications on concrete overlays 1" or thicker
- Interior and exterior applications

Meets the performance requirements of ASTM C 1059 Type I & II

Item No.	Package Size	Metric	Quantity
9902-14	1 qt. bottle	946 mL	12/case
9902-01	1 gal. bottle	3.8 L	4/case
9902-05	5 gal. pail	18.9 L	36/pallet



CONCRETE ACRYLIC FORTIFIER

Acrylic resin admixture designed to enhance bonding and water resistance of concrete patching materials, stucco, surface bonding cement, thin-set mortars and tile grouts.

Use To:

- Improve bonding to existing surfaces
- Eliminate moist curing in most circumstances
- Reduce permeability

Meets the requirements of ASTM C 1438

Item No.	Package Size	Metric	Quantity
8610-14	1 qt. bottle	946 mL	12/case
8610-01	1 gal. bottle	3.8 L	4/case
8610-05	5 gal. pail	18.9 L	36/pallet



January 1997 Launches first website

January 1998 Introduces Commercial Grade FASTSET Products

1998



70th Plant

LIQUID CEMENT COLORS

Mix with water and then add to dry concrete mix. One bottle will mix with two 80 lb. or 60 lb. bags of Concrete Mix. Available in red, brown, buff, charcoal and terra cotta.

Use For:

- Adding color to WalkMaker projects
- Adding color to any concrete, mortar, sand topping or stucco project
- Provides permanent integral color

Meets the requirements of ASTM C 979



Item No.	Package Size	Metric	Quantity
Charcoal			
1317-00	10 oz. bottle	296 mL	12/case
Brown			
1317-01	10 oz. bottle	296 mL	12/case
Buff			
1317-02	10 oz. bottle	296 mL	12/case
Red			
1317-03	10 oz. bottle	296 mL	12/case
Terra Cotta			
1317-04	10 oz. bottle	296 mL	12/case



CONCRETE & ASPHALT CLEANER - CONCENTRATE

A multi-purpose cleaner that is safe to use on any hard surface where water can be used. Use prior to any repair project to achieve the strongest bond. Non-toxic, non-flammable and contains no acid.

Use For:

- Removing soil, grease, oil, etc. from all types of masonry, stucco concrete, mortar and grout

Item No.	Package Size	Metric	Quantity
8601-14	1 qt. bottle	946 mL	12/case
8601-01	1 gal. bottle	3.8 L	4/case



CONCRETE MIX ACCELERATOR

Add to concrete mix for faster set time. Use one to two boxes of accelerator per 60 lb. (27.2 kg) bag of concrete mix.

Use For:

- Fence and lamp post
- Swing sets
- Curbs
- Basketball backboards
- Piers

Item No.	Package Size	Metric	Quantity
9800-01	1.5 lb. carton	.68 kg	24/case



THERMO-LUBE®

Winter admixture. Reduces the time that the fresh concrete or mortar needs to be protected from freezing. Reduces set time and improves initial strength gain.

Use In:

- Concrete and mortar in cold weather

Item No.	Package Size	Metric	Quantity
1905-01	1 gal. bottle	3.8 L	4/case
1905-05	5 gal. pail	18.9 L	36/pallet



LIQUID STUCCO & MORTAR COLORS


Adds a decorative touch to stucco and mortar projects. Add to mixing water and then mix colored water with dry mix. Provides permanent integral color.

Use with any of our mortar or stucco products including:

- QUIKRETE® Finish Coat Stucco
- Heavy Duty Masonry Coating
- One Coat Fiberglass Reinforced Stucco
- Mason Mix
- QUIKWALL®

20 colors available. Textured color chart available.

Item No.	Package Size	Metric	Quantity
1319	10 oz. bottle	296 mL	12/case

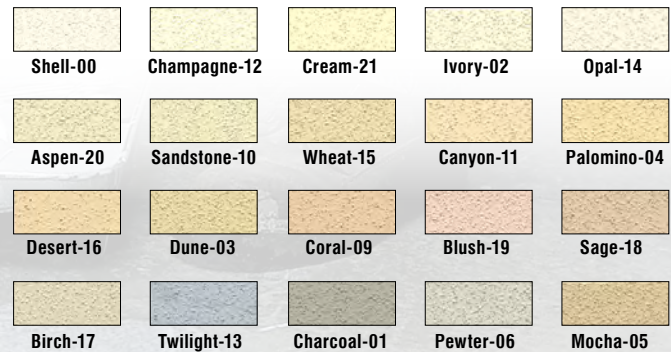

January 2000 Introduces "QUIKRETE® Makes It Easy" ad campaign

January 2001 Introduces Concrete Resurfacer

January 2003 Introduces project illustrations featured on product packaging





FASTSET CONCRETE MIX

A rapid hardening concrete mix designed with a 20-30 minute set time, allowing for mixing, pouring and finishing. Use at any thickness from 1-1/2" to 24".

Use to build or repair:

- Street repairs
- Concrete parking lots
- Highways
- Concrete floors
- Bridge decks
- Sidewalks

Compressive Strength ASTM C 39

3 Hours	3000 psi	20.7 MPa
24 Hours	5000 psi	34.5 MPa
7 Days	6000 psi	41.3 MPa
28 Days	7000 psi	48.3 MPa

Exceeds the requirements of ASTM C 928 R-3

Item No.	Package Size	Metric	Quantity
1004-51	70 lb. bag	31.7 kg	42/pallet



FASTSET REPAIR MORTAR

A low-sag repair mortar formula. Ideal for vertical & overhead repairs. 20-30 minute working time & unique properties allow sculpting of the material during placement.

Use for repairing:

- Pre-stress panels
- Retaining walls
- Tunnels
- Loading docks
- Bridge columns
- Curbs/steps

Compressive Strength ASTM C 109 Modified

3 Hours	2000 psi	13.8 MPa
24 Hours	4000 psi	27.6 MPa
7 Days	5000 psi	34.5 MPa
28 Days	6000 psi	41.4 MPa

Exceeds the requirements of ASTM C 928 R-2

Item No.	Package Size	Metric	Quantity
1241-20	20 lb. pail	9.1 kg	60/pallet
1241-50	50 lb. pail	22.7 kg	each
1241-60	60 lb. bag	27.2 kg	56/pallet



FASTSET NON-SHRINK GROUT

For structural concrete repairs from 1/4" to 24" deep. 30 minute set time, non shrink characteristics & rapid strength gain. Can be mixed to a plastic, flowable or fluid consistency.

Use for anchoring & grouting:

- Anchor bolts
- Steel column bases
- Bearing plates
- Floor leveling
- Pre-cast concrete keyways

Compressive Strength ASTM C 109

Time	Fluid	Flowable	Plastic
3 Hours	2000 psi (13.8 MPa)	2500 psi (17.2 MPa)	3000 psi (20.7 MPa)
24 Hours	4000 psi (27.6 MPa)	4500 psi (31.0 MPa)	5000 psi (34.5 MPa)
7 Days	5000 psi (34.5 MPa)	5500 psi (37.9 MPa)	6000 psi (41.3 MPa)
28 Days	6500 psi (44.8 MPa)	7500 psi (51.7 MPa)	8000 psi (55.1 MPa)

Exceeds the requirements of ASTM C 928 R-3 and ASTM C 1107.

Item No.	Package Size	Metric	Quantity
1585-20	20 lb. pail	9.1 kg	60/pallet
1585-50	50 lb. pail	22.7 kg	each
1585-09	60 lb. bag	27.2 kg	56/pallet



NON-SHRINK PRECISION GROUT

High strength, non-metallic, non-shrink grout designed for precision grouting and general construction applications. Can be mixed to a plastic, flowable or fluid consistency.

Use For:

- Grouting heavy equipment, pre-cast concrete, bearing plates, steel columns and anchoring applications

Compressive Strength at 28 Days

Plastic	14,000 psi	96.5 MPa
Flowable	12,000 psi	86.2 MPa
Fluid	8,000 psi	55.2 MPa

Meets the requirements of ASTM C 1107 and Army Corp. of Engineers CRD 621

Item No.	Package Size	Metric	Quantity
1585-00	50 lb. bag	22.7 kg	64/pallet
1585-00	50 lb. bag	22.7 kg	35/mini pallet

January 2003 Introduces current QUIKRETE® logo & new packaging

May 2003 Runs national TV ad featuring Concrete Resurfacer

January 2006 Introduces Veneer Stone Mortar & FastSet DOT Mix





NON-SHRINK GENERAL PURPOSE GROUT

High strength, non-metallic Portland cement based grout including expansive additives. Can be mixed to a plastic, flowable or fluid consistency.

Use For:

- Grouting, anchoring and general construction applications

Compressive Strength at 28 Days

Plastic	10,000 psi	68.9 MPa
Flowable	9,000 psi	62.1 MPa
Fluid	8,000 psi	55.2 MPa

Meets the requirements of ASTM C 1107 and Army Corp. of Engineers CRD 621, tested at 70 °F

Item No.	Package Size	Metric	Quantity
1585-01	50 lb. bag	22.7 kg	64/pallet



FIBER-REINFORCED DECK MIX & POLYMER MODIFIED FIBER-REINFORCED DECK MIX

Portland cement based, high-early strength 6000 PSI concrete mix. The fiber-reinforced and air-entrained formation provides improved freeze/thaw durability and crack resistance and contains an integral corrosion inhibitor.

Use for:

- Parking structures
- Loading docks
- Roads
- Bridge decks
- Balconies
- Industrial floors

Item No.	Package Size	Metric	Quantity
Fiber-Reinf 1251-80	80 lb. bag	36.2 kg	42/pallet
Poly-Mod 1251-81	80 lb. bag	36.2 kg	42/pallet



SHOTCRETE MS & SHOTCRETE MS-FIBER REINFORCED

Portland cement based structural repair material for making repairs to horizontal, vertical or overhead surfaces. The micro silica enhanced formulation provides high adhesion and very low rebound and permeability characteristics. Shotcrete MS is available in alkali-resistant fiberglass fiber, polypropylene fiber or steel fiber formulations.

Use for construction and repair of:

- Tunnels
- Foundations
- Structural concrete line
- Slope stabilization
- Bridge columns & beams
- Walls

Also available in 3000 lb. bulk bags.

* Achieves 9000 PSI (MPa) at 28 days when field applied

Item No.	Package Size	Metric	Quantity
1228-80	50 lb. bag	22.7 kg	64/pallet
1229-81	80 lb. bag	36.2 kg	42/pallet
Fiber-Reinf 1228-51	50 lb. bag	22.7 kg	64/pallet



ARCHITECTURAL FINISH

Polymer modified, Portland cement based repair material designed to make smooth repairs to surface defects such as honey combs, bug-holes, spalls and chips.

Use For:

- Tilt-up wall panels
- Pre-cast concrete
- Poured concrete
- Masonry surfaces

Item No.	Package Size	Metric	Quantity
1220-55	40 lb. bag	18.1 kg	80/pallet



FORM & POUR

High-flow, high-strength concrete mix designed for structural repairs to bridge, parking structures, tunnels, dams, concrete walls, industrial floors and filling voids in concrete. The material is air entrained (5-7%) and achieves a compressive strength of 6500 psi when poured at a 7"-9" slump and 8000 PSI when poured in a 4"-5" slump

Item No.	Package Size	Metric	Quantity
808100-65	80 lb. bag	36.2 kg	42/pallet

January 2007 Introduces PowerLoc™ Jointing Sand



2008



80th Plant

March 2008 Introduces Concrete Patching Compound & Countertop Mix



FASTSET DOT MIX & FASTSET DOT MIX - EXTENDED

For structural concrete repair of bridge decks, roadways & parking decks from 1/2" to 24" thick. Can be extended with up to 25 lb. of 3/8" stone or gravel with a top size of up to 1/2" for patched over 2" thick. Also available in pre-extended formulas (No. 1244-80).

Use for anchoring & grouting:

- Structural concrete repair
- Roadways
- Bridge decks
- Parking deck applications

Compressive Strength ASTM C 109

1 1/2 Hours	3000 psi	20.7 MPa
3 Hours	4500 psi	31.0 MPa
24 Hours	6500 psi	44.8 MPa
7 Days	8000 psi	55.1 MPa
28 Days	10,000 psi	69.0 MPa

Exceeds the requirements of ASTM C 928 R-3

Exceeds DOT region 3 requirements for exposure to de-icing chemicals

Item No.	Package Size	Metric	Quantity
1244-56	55 lb. bag	25.0 kg	64/pallet
Extended			
1244-80	80 lb. bag	36.2 kg	42/pallet



RAPID ROAD REPAIR® & RAPID ROAD REPAIR® - EXTENDED

Fast-setting, rapid-hardening structural repair mortar, designed to make pavement repairs to concrete pavement. Alkali-resistant fiber reinforced for improved flexural performance. Available in pre-extended formula (No. 1242-80)

Use For Repairing:

- Highways
- Concrete footings
- Bridge decks
- Parking garages
- Runways
- Driveways

Item No.	Package Size	Metric	Quantity
1242-51	50 lb. bag	22.7 kg	64/pallet
Extended			
1242-80	80 lb. bag	36.2 kg	42/pallet

Exceeds: 3000 psi (20.7 MPa) at 1 hour

8300 psi (57.5 MPa) at 28 days

Exceeds the requirements of ASTM C 928 R-3



RAPID ROAD REPAIR® TYPICAL COMPRESSIVE STRENGTH ASTM C 109

TIME	PSI
1 HOUR	3000 PSI (20.7 MPa)
3 HOURS	3400 PSI (23.4 MPa)
24 HOURS	5000 PSI (35.9 MPa)
7 DAYS	8100 PSI (55.9 MPa)
28 DAYS	8370 PSI (57.7 MPa)

RAPID ROAD REPAIR® - EXTENDED TYPICAL COMPRESSIVE STRENGTH ASTM C 109

TIME	PSI
90 MINUTES	2000 PSI (13.8 MPa)
24 HOURS	4000 PSI (27.6 MPa)
7 DAYS	5500 PSI (37.9 MPa)
28 DAYS	6000 PSI (41.4 MPa)

RIP RAP

Commercial grade blend of Portland cement and specially graded sand, packaged in a fiber reinforced, biodegradable bag for erosion control applications. Requires no mixing or equipment to install. The free-form construction method also allows for the elimination of forming and finishing procedures and is ideal for remote and accessible locations.

Use For:

- Slopes
- Bulkheads
- Seawalls
- Lake fronts
- Riverbanks
- Embankments
- Revetment
- Culverts
- Beaches
- Dams
- Canals

Item No.	Package Size	Quantity
1129-60	60 lb. bag	56/pallet
1129-80	80 lb. bag	42/pallet
SCRIM		
1134-80	80 lb. bag	42/pallet
BURLAP		
1129-60	60 lb. bag	56/pallet
POLY		
1129-62	60 lb. bag	56/pallet



January 2009 Introduces Base Coat Stucco - Pump Grade

January 2009 Publishes Guide To Concrete, Masonry & Stucco Projects

January 2010 Introduces Hardscapes by QUIKRETE®





ONE COAT FIBERGLASS REINFORCED STUCCO

An alkali resistant fiberglass reinforced stucco designed for use in one-coat stucco applications. Available in a sanded version requiring only the addition of water or a concentrated version which requires the addition of clean plaster sand and water.

Features & benefits include:

- Crack resistant formula
- Extended board life
- 1 hour fire rating over plywood or OSB & EPS foam when applied in accordance with ICC ESR-1240
- Superior workability

Item No.	Package Size	Metric	Quantity
Sanded			
1200-80	80 lb. bag	36.2 kg	42/pallet
Concentrated			
1216-80	80 lb. bag	36.2 kg	42/pallet
1216-93	90 lb. bag	40.8 kg	35/pallet



BASE COAT STUCCO

A Portland cement based stucco used for construction and repair of stucco walls. Available in Extended Board- Life formulation.

Use For:

- Scratch and brown coat in a three coat stucco application
- Apply directly to masonry walls in a two coat stucco application
- Superior workability

Meets the requirements of ASTM C 926 for cement based plaster

Item No.	Package Size	Metric	Quantity
1139-81	50 lb. bag	22.7 kg	56/pallet
1139-80	80 lb. bag	36.2 kg	42/pallet
Ext. Board			
1139-87	80 lb. bag	36.2 kg	42/pallet



BASE COAT STUCCO-PUMP GRADE

A fiber reinforced contractor grade pre-blended Portland cement based scratch and brown coat stucco mix.

Use For:

- Scratch and brown coat in a three coat stucco application
- Apply directly to masonry walls in a two coat stucco application
- May be spray or trowel applied

Exceeds the requirements of ASTM C 926 for Portland cement based plaster

Item No.	Package Size	Metric	Quantity
1139-86	80 lb. bag	36.2 kg	42/pallet



BASE COAT STUCCO with WATER-STOP

An exterior stucco with Water-Stop additive, used for the construction and repair of stucco walls. The Water-Stop, waterproofing additive prevents moisture penetration from wind driven rain.

Use For:

- Scratch and brown coat in a three coat stucco application
- Apply directly to masonry walls in a two coat stucco application

Meets the requirements of ASTM C 926 requirements for cement based plaster.

Item No.	Package Size	Metric	Quantity
1139-89	80 lb. bag	36.2 kg	42/pallet



FINISH COAT STUCCO

A stucco finishing plaster designed for use as a color and texture coat over Portland cement base coat or QUIKRETE® Fiberglass Reinforced Stucco. Requires only the addition of water. Available in white or gray. Color can be added using QUIKRETE® Stucco & Mortar Color.

Use For:

- A decorative color and texture finish coat for stucco

90 lb. (40.5 kg) Finish Coat Stucco Available Regionally

Item No.	Package Size	Metric	Quantity
White			
1201-80	80 lb. bag	36.2 kg	42/pallet
1201-80	80 lb. bag	36.2 kg	24/mini pallet
1201-91	90 lb. bag	40.8 kg	35/pallet
Gray			
1202-80	80 lb. bag	36.2 kg	42/pallet
1202-80	80 lb. bag	36.2 kg	24/mini pallet
1201-92	90 lb. bag	40.8 kg	35/pallet



QUIKWALL® SURFACE BONDING CEMENT

An alkali resistant fiberglass reinforced, Portland cement based surface bonding cement used for construction of dry-stack (without mortar) cement block walls. Add color with QUIKRETE® Stucco & Mortar Color. **Use For:**

- Waterproofing and strengthening block walls without mortar
- Rehabilitating existing walls with a water-resistant & decorative coating
- Construction of structural and non-structural walls

Meets the requirements of ASTM C 887

Item No.	Package Size	Metric	Quantity
White			
1230-50	50 lb. bag	22.7 kg	64/pallet
1230-50	50 lb. bag	22.7 kg	35/mini pallet
Gray			
1231-50	50 lb. bag	22.7 kg	64/pallet
1231-50	50 lb. bag	22.7 kg	35/mini pallet
Unsanded			
1220-50	50 lb. bag	22.7 kg	64/pallet



PRE-MIXED STUCCO PATCH

Ready-to-use acrylic latex formula for making repairs to cracks, breaks and holes up to 1/4" thick in stucco surfaces.

- Dries to a durable and flexible finish
- Sanded formula blends with the texture of surrounding stucco

Item No.	Package Size	Metric	Quantity
8650-32	1 qt. pail	.95 L	24/case

January 2010 QUIKRETE® celebrates 70th Anniversary with Rose Parade Float



2010



90th Plant

January 2011 Introduces QR Codes & full-color project photos featured on QUIKRETE® Repair Products





PREMIUM PLAY SAND®

Specially graded fine sand that has been washed, dried and screened.

Use For:

- Children's sand boxes
- Molding and building

Item No.	Package Size	Metric	Quantity
1113-51	50 lb. bag	22.7 kg	56/pallet



ALL-PURPOSE SAND

Washed, properly graded coarse sand with multiple uses.

Use For:

- Underlayment for brick pavers and flagstone
- Increasing traction on snow and ice
- Mixing with potting soil or for use in other garden applications
- Mixing with Portland cement and gravel to make concrete mix

Meets ASTM C 33 specifications

Item No.	Package Size	Metric	Quantity
1152-51	50 lb. bag	22.7 kg	56/pallet
1152-70	70 lb. bag	31.7 kg	42/pallet
Poly-woven			
1152-60	60 lb. bag	27.2 kg	56/pallet



ALL-PURPOSE GRAVEL

Multi-use product for a variety of decorative and landscaping applications. Also for making concrete. Washed, properly graded gravel.

Use For:

- Landscaping, gardening, patios, tree wells, walks, rooftops, fish ponds and aquariums
- Mix with Portland cement & all purpose sand to make concrete mix

Meets ASTM C 33 specifications.

Item No.	Package Size	Metric	Quantity
1151-50	50 lb. bag	22.7 kg	56/pallet



POWERLOC® JOINTING SAND

A polymer-modified graded sand for filling between interlocking pavers, brick, patio blocks and concrete slabs up to 1/2" (12.7 mm) wide. Once swept into the paver joints & dampened with a water mist it hardens, locking pavers into place. Also available in a dark color.

Features & benefits include:

- Resists erosion
- Stabilizes pavers
- Non-staining
- Contains safe organic binder
- Resists weed growth & insects
- Environmentally friendly

Item No.	Package Size	Metric	Quantity
1150-47	50 lb. bag	22.7 kg	56/pallet
Dark			
1150-37	50 lb. bag	22.7 kg	56/pallet



PATIO PAVER BASE SAND

Underlayment base sand used to provide a firm, stable base, for interlocking pavers, flagstone, brick and patio block.

Use For:

- Driveways
- Walkways
- Patios

Item No.	Package Size	Metric	Quantity
1150-49	50 lb. bag	22.7 kg	56/pallet



PATIO PAVER JOINTING SAND

Properly graded fine sand for filling joints between interlocking pavers, flagstone, brick & patio block.

Use For:

- Driveways
- Walkways
- Patios

Item No.	Package Size	Metric	Quantity
1150-59	50 lb. bag	22.7 kg	56/pallet



COMMERCIAL GRADE SAND

Consistently graded washed and kiln dried sand with multiple industrial and construction applications.

Use For:

- Underlayment for brick pavers and flagstone
- Epoxy and industrial coatings
- Specialized cement mixes

Item No.	Package Size	Metric	Quantity
Fine			
1961-52	50 lb. bag	22.7 kg	56/pallet
1961-02	100 lb. bag	45.4 kg	30/pallet
Medium			
1962-51	50 lb. bag	22.7 kg	56/pallet
1962-01	100 lb. bag	45.4 kg	30/pallet
Coarse			
1963-03	50 lb. bag	22.7 kg	56/pallet
1963-01	100 lb. bag	45.4 kg	30/pallet

June 2011 Introduces project how-to videos, establishes social media presence on Facebook & Twitter

January 2012 Introduces polyurethane sealants, Zip & Mix™ Repair Mortar & anchoring epoxies

September 2013 Introduces QUIKRETE® Concrete Coatings





POOL FILTER SAND

Properly graded clean silica sand.

Use For:

- Swimming pool filtration systems
- 20/40 gradation

Item No.	Package Size	Metric	Quantity
1153-50	50 lb. bag	22.7 kg	56/pallet



MASON SAND

A washed, properly graded, fine masonry sand. **Use for:**

- Mix with QUIKRETE® Portland Cement & Hydrated Lime or QUIKRETE® Masonry Cement to make Mortar Mix
- Fill joints between patio pavers, bricks or stone
- Mix with potting soil or use for other garden applications

Item No.	Package Size	Metric	Quantity
1961-56	50 lb. bag	22.7 kg	56/pallet



WASHED PLASTER SAND

A washed, properly graded, coarse plaster sand. **Use for:**

- Mix with QUIKRETE® Portland Cement & Hydrated Lime - Type S or with QUIKRETE® Plastic Cement to make Base Coat Stucco
- Mix with potting soil or use for other garden applications

Item No.	Package Size	Metric	Quantity
1152-58	50 lb. bag	22.7 kg	56/pallet

Meets ASTM C 897 specifications Contains approx. 1/2 cu. ft. (14.2 L) of sand by volume



ATHLETIC FIELD MARKER

Pulverized white limestone or marble used for marking athletic fields.

Item No.	Package Size	Metric	Quantity
1954-00	50 lb. bag	22.7 kg	56/pallet

LIME PRODUCTS



HYDRATED LIME - TYPE S

For use in building construction. Can be mixed with Portland cement and other ingredients to make mortar mix and base coat stucco.

Meets the requirements of ASTM C 207, Type S Hydrated Lime for masonry purposes

Item No.	Package Size	Metric	Quantity
9907-53	50 lb. bag	22.7 kg	50/pallet



AGRICULTURAL LIME

Calcium Carbonate used to neutralize soil acidity
Available Regionally

Item No.	Package Size	Metric	Quantity
1111-50	50 lb. bag	22.7 kg	56/pallet

February 2015 Introduces
Q•MAX PRO Concrete Mix



March 2015 Introduces
QUIKRETE® Mobile App



HardScapes

by **QUIKRETE**



STONES, PEBBLES & ROCK

Stone, pebbles and rocks for landscaping.

Use for:

- Controlling erosion
- Resisting decay
- Decorative features

Packaging elements:

- Quantity Calculators
- Bilingual
- Product Descriptions
- Heavy Duty Bags
- Size 0.5 cu. ft.
- UV Resistant

Rock varieties:

- Red Lava Rock
- Pond Pebbles
- Marble Chips
- River Pebbles
- Crushed Rock
- All-Purpose Stone
- Pea Pebbles

STONES, PEBBLES & ROCK

Item No.	Package Size	Metric	Quantity
Marble Chips			
1175-00	0.5 cu. ft.	.014 cu. m	63/pallet
Red Lava Rock			
1175-05	0.5 cu. ft.	.014 cu. m	63/pallet
Pea Pebbles			
1175-10	0.5 cu. ft.	.014 cu. m	63/pallet
River Pebbles			
1175-15	0.5 cu. ft.	.014 cu. m	63/pallet
All-Purpose Stone			
1175-20	0.5 cu. ft.	.014 cu. m	63/pallet
Pond Pebbles			
1175-25	0.5 cu. ft.	.014 cu. m	63/pallet



POLYMERIC JOINTING SAND

A polymer-modified graded sand for filling joints up to 2" wide between interlocking pavers, brick, natural stone and concrete slabs. Once swept into the paver joints & dampened with a water mist it hardens, locking pavers into place.

Features & benefits include:

- Resists erosion
- Resists weed growth & insects
- Commercial or Residential Use
- Stabilizes pavers

STABILIZING SAND

Item No.	Package Size	Metric	Quantity
1175-56	50 lb. bag	22.7 kg	64/pallet



PAVER BASE

Paver base provides a firm, stable foundation for interlocking pavers, flagstone, bricks or patio block. **Use as a base for:**

- Pavers
- Concrete slabs
- Walkways



PAVER SAND

A properly graded fine sand used to fill joints between interlocking pavers, flagstone, bricks or patio block. **Use or:**

- Patios
- Walkways
- Driveways



PLAY SAND

Specially graded washed sand.

Ideal for:

- Childrens' sand boxes
- Molding
- Safe surface for playground



ALL-PURPOSE SAND

Washed, properly graded coarse sand with multiple uses including, paver underlayment, soil and garden applications and mixing with cement. **Ideal for:**

- Pavers
- Mixing with cement
- Soil & garden

SPECIALTY SANDS

Item No.	Package Size	Metric	Quantity
1175-45	0.5 cu. ft.	.014 cu. m	63/pallet

Item No.	Package Size	Metric	Quantity
1175-40	0.5 cu. ft.	.014 cu. m	63/pallet

Item No.	Package Size	Metric	Quantity
1175-50	0.5 cu. ft.	.014 cu. m	63/pallet

Item No.	Package Size	Metric	Quantity
1175-35	0.5 cu. ft.	.014 cu. m	63/pallet

FAST-SETTING SELF-LEVELING FLOOR RESURFACER & SELF-LEVELING FLOOR RESURFACER

Self-finishing interior floor topping and underlayment specially formulated to produce a smooth surface ready for the installation of ceramic tile, resilient flooring or other finishes. No troweling required. **Use for:**

- Resurfacing existing concrete floors with damaged finishes
- Over new concrete floors & pre-cast slabs w/unacceptable finishes

Fast-Setting formula exceeds: 1,800 psi (12.4 MPa) in 24 hours
4,000 psi (27.6 MPa) in 7 days
5,500 psi (37.9 MPa) in 28 days.

Regular formula exceeds: 1,000 psi (6.9 MPa) in 7 days
2,000 psi (13.8 MPa) in 28 days.



Item No.	Package Size	Metric	Quantity
Fast-Setting			
1249-51	50 lb. bag	22.7 kg	64/pallet
Regular			
1249-50	50 lb. bag	22.7 kg	64/pallet

THIN SET SANDED

A Portland cement based thin set for setting absorptive & non-absorptive tile on walls and floors. Addition of Acrylic Fortifier is recommended.

Apply over:

- Concrete
- Concrete block
- Cementitious backer board
- Wall board
- Portland cement plaster
- Plywood expanded metal lath

Meets the requirements of ANSI A 118-1



Item No.	Package Size	Metric	Quantity
1547-50	50 lb. bag	22.7 kg	63/pallet

THIN SET SANDED - WHITE

A white Portland cement based thin set for setting absorptive & non-absorptive tile on walls and floors. Addition of Acrylic Fortifier is recommended.

Apply over:

- Concrete
- Concrete block
- Cementitious backer board
- Wall board
- Portland cement plaster
- Plywood expanded metal lath

Meets the requirements of ANSI A 118-1



Item No.	Package Size	Metric	Quantity
1547-51	50 lb. bag	22.7 kg	63/pallet

MULTI-PURPOSE THIN SET

A polymer modified, Portland cement based thin set used for setting ceramic tile and natural stone such as marble or granite and saltillo tile on walls and floors. Requires no additional latex or fortifiers. Available in gray and white.

Apply over:

- Plywood
- Cementitious backer units
- Portland cement plaster
- Concrete
- Concrete block
- Wall boards

Meets the requirements of ANSI A 118-1 and ANSI A 118.4.



Item No.	Package Size	Metric	Quantity
Gray			
1550-49	50 lb. bag	22.7 kg	63/pallet
White			
1550-50	50 lb. bag	22.7 kg	63/pallet

FLOOR MUD

Portland cement based underlayment mortar designed for leveling travertine, slate and marble floor tile, and for shower pan applications



Item No.	Package Size	Quantity
1548-81	60 lb. bag	56/pallet
1548-82	80 lb. bag	42/pallet

WALL FLOAT

Portland cement based leveling mortar for vertical applications of tile, marble and brick veneer. Addition of Acrylic Fortifier or Concrete Bonding Adhesive is recommended.



Item No.	Package Size	Quantity
153-50	50 lb. bag	65/pallet
153-76	75 lb. bag	48/pallet

COMMERCIAL GRADE PERMANENT BLACKTOP REPAIR



High performance asphalt cold patch specially formulated for permanent repairs to potholes and cracks over 1 inch (25 mm) wide in asphalt pavement. DOT Approved formula. Stays pliable in cold weather applications.

- Use all-year-round in wet or dry conditions
- Can be used in hot or cold weather
- Provides superior bond strength
- Does not require heating or mixing, pour directly out of bag
- Can be formed and compacted
- Patched area is ready for immediate use
- Very Low VOC formula - Meets all state requirements

Item No.	Package Size	Metric	Quantity
1701-59	50 lb. bag	22.7 kg	63/pallet

ASPHALT COLD PATCH - 90% RECYCLED MATERIALS



High performance cold patch containing recycled materials and special binder additives. Environmentally friendly formula permanently bonds to surrounding asphalt pavement. *Available Regionally*

Other features & benefits include:

- No odor/very low VOC
- Repair area is ready for immediate use
- No heating or mixing required

Meets Air Quality Standards of AQMD Rule 1108

Item No.	Package Size	Metric	Quantity
1701-58	50 lb. bag	22.7 kg	63/pallet

BLACKTOP REPAIR



A weather-resistant crack-filler, provides excellent adhesion and minimal shrinkage. Helps prevent water and ice damage to blacktop surfaces. Dries to a textured black finish. Non-flammable. Very Low VOC formula - Meets all state requirements.

Use For:

- Repairing cracks in blacktop and asphalt surfaces including driveways, roofs and chimney flashings

Item No.	Package Size	Metric	Quantity
8630-15	5.5 oz. tube	163 mL	12/case
8630-10	10 oz. tube	300 mL	12/case

BLACKTOP CRACK SEAL



A uniformly blended latex emulsion, specifically designed to adhere to asphalt and concrete surfaces. No mixing is required. Just pour from the bottle. Black color blends with surrounding surface.

Use For:

- Repairing cracks in blacktop and asphalt surfaces

Item No.	Package Size	Metric	Quantity
8640-05	1 qt. bottle	946 mL	12/case
8640-06	1 gal. bottle	3.8 L	4/case



TRANSLUCENT CONCRETE STAINS

Semi-translucent appearance highlights the natural variations in concrete and masonry surfaces. Translucent Concrete Stain can be used in multiple color combinations to achieve a unique multi-tone, layered appearance.

- Does not peel
- Interior or exterior use
- Low odor & Low VOC
- Water based, Polymer-Bonded, UV Resistant formula
- Matte finish
- Ideal for garage floors, driveways, pool decks, sidewalks & patios



PENETRATING CONCRETE STAINS

Opaque appearance provides deep, rich color that is highlighted by the natural variations of concrete and masonry surfaces.

- Matte finish
- Penetrating Stain does not peel
- Low odor & Low VOC
- Water based, Polymer-Bonded, UV Resistant formula
- Interior or exterior use
- Ideal for floors, driveways, sidewalks & patios



CONCRETE ETCHING STAINS

Transforms plain concrete into a marble-like appearance with warm earth tones and unique shading. The acid-based stains react with the cement as they penetrate the surface, creating a permanent effect.

- Use on new or existing concrete
- Interior or exterior use
- Permanently stains concrete in one step
- Creates unique, decorative, multi-toned appearance
- Ideal for interior rooms, patios, porches & driveways



Item No.	Package Size	Metric	Quantity
Red 7215-00	1 Gallon	3.8 L	4/case
Terra Cotta 7215-01	1 Gallon	3.8 L	4/case
Cola 7215-02	1 Gallon	3.8 L	4/case
Light Brown 7215-04	1 Gallon	3.8 L	4/case
Light Gray 7215-03	1 Gallon	3.8 L	4/case
Blue 7215-05	1 Gallon	3.8 L	4/case
Golden Wheat 7215-07	1 Gallon	3.8 L	4/case
Brick Red 7215-06	1 Gallon	3.8 L	4/case

Item No.	Package Size	Metric	Quantity
Charcoal 7215-16	1 Gallon	3.8 L	4/case
Gray 7215-15	1 Gallon	3.8 L	4/case
Walnut Brown 7215-17	1 Gallon	3.8 L	4/case
Burnt Orange 7215-18	1 Gallon	3.8 L	4/case

Item No.	Package Size	Metric	Quantity
Tan 7215-25	1 Gallon	3.8 L	4/case
Coffee 7215-26	1 Gallon	3.8 L	4/case
Black 7215-27	1 Gallon	3.8 L	4/case
English Red 7215-28	1 Gallon	3.8 L	4/case
Olive 7215-29	1 Gallon	3.8 L	4/case

SURFACE PREPARATION & CLEANERS



CLEANER, ETCHER & DEGREASER

Surface preparation treatment for use prior to repairing, sealing or staining concrete, paver and masonry surfaces

- Degreases, cleans oil and etches the surface
- Significantly improves adhesion of coatings and repair materials
- Concentrated formula
- Solvent-free, Low odor and Low VOC

Item No.	Package Size	Metric	Quantity
8675-34	1 Gallon	3.8 L	4/case



OIL STAIN REMOVER

Removes oil stains and grease from concrete, paver and masonry surfaces.

- Heavy duty cleaner
- Solvent-free formula
- Ideal for use on concrete, garage floors, driveways and patios
- Low odor and Low VOC

Item No.	Package Size	Metric	Quantity
8670-06	1 Gallon	3.8 L	4/case



EFFLORESCENCE & RUST REMOVER

Removes efflorescence salts, rust and hard water deposits from horizontal and vertical concrete, pavers, brick, masonry and stucco

- Use to remove efflorescence, rust and other stains from surface
- Ideal for use on concrete or paver patios and walkways, and masonry or stucco walls
- Renews concrete, masonry and paver surfaces
- No scrubbing required

Item No.	Package Size	Metric	Quantity
8675-33	1 Gallon	3.8 L	4/case

CONCRETE & MASONRY COATINGS



MASONRY WATERPROOFER

Beautifies and waterproofs porous concrete and masonry surfaces.

- Heavy duty resin technology delivers maximum adhesion and a water-tight barrier
- Resists surface mold and mildew
- Ideal for basement walls, foundations and other porous surfaces
- Can be applied by roller or brush
- Ready-to-use
- Color: Bright White

Item No.	Package Size	Metric	Quantity
8610-09	1 Gallon	3.8 L	4/case
8610-29	5 Gallon	18.9 L	each



TEXTURED ACRYLIC CONCRETE COATING

Textured acrylic coating provides a non-slip, new look finish to concrete surfaces

- Provides a consistent color and new look finish to old worn concrete surfaces
- Heavy duty resin technology provides superior adhesion to concrete surfaces
- Ideal for steps, sidewalks, driveways and patios
- Ready-to-use

Item No.	Package Size	Metric	Quantity
Gray 8730-06	1 Gallon	3.8 L	4/case
Gray 8730-07	5 Gallon	3.8 L	Each
Mocha 8730-36	1 Gallon	3.8 L	4/case
Mocha 8730-37	5 Gallon	3.8 L	Each
Sedona Red 8730-16	1 Gallon	3.8 L	4/case
Sedona Red 8730-17	5 Gallon	3.8 L	Each
Cool Gray 8730-26	1 Gallon	3.8 L	4/case
Cool Gray 8730-27	5 Gallon	3.8 L	Each





GARAGE FLOOR COATING

An advanced formula, water-based epoxy formulated for long lasting performance as a garage floor coating. Protects against oil, grease and chemicals.


- Showroom high gloss finish with exceptional durability
- Superior adhesion eliminates hot tire pickup
- 1 car kit covers up to 250 sq ft

Kit Includes:


- 2 part epoxy
- Cleaner, Etcher & Degreaser
- Application instructions
- Color flakes
- Stir stick



Item No.	Package Size	Metric	Quantity
Gray 0703-57	KIT 120 fl oz	3.6 L	EACH
Tan 0703-58	KIT 120 fl oz	3.6 L	EACH



Gray



Tan



EPOXY HIGH-GLOSS COATING

Clear, advanced formula, water-based epoxy formulated for long lasting performance as a garage floor protective coating. For use on bare or coated concrete.

- Provides superior chemical resistance & durability
- High solids, clear protective coating
- One kit covers up to 500 sq ft of coated concrete

Kit Includes:

- 2 part epoxy
- Stir stick
- Anti-Skid additive
- Application instructions



Item No.	Package Size	Metric	Quantity
0703-55	KIT 120 fl oz	3.6 L	EACH


COLOR FLAKES

Add a custom touch to your Garage Floor Coating project. Available for both Gray and Tan coatings, Color Flakes give depth to newly coated surfaces.

- Custom appearance
- Available for Gray and Tan
- Add as little or as much as you like



Blue Blend added to Gray Garage Floor Coating



Tan Blend added to Tan Garage Floor Coating



QUIK-TUBE® BUILDING FORMS

Rigid fiber building form tube eliminates the need to build wood forms. Available regionally in 10 foot & 12 foot lengths.

Use For:

- Mailbox bases
- Deck supports
- Columns

Item No.	Package Size	Metric	Quantity
6922-01	8 in. dia x 4 ft. h	20 cm x 1.2 m	36/tray
6922-02	10 in. dia x 4 ft. h	25.4 cm x 1.2 m	24/tray
6922-03	12 in. dia x 4 ft. h	30.5 cm x 1.2 m	18/tray



EXPANSION JOINT STRIPS

Expansion joint filler made from resilient cane fibers used to prevent damage during expansion and contraction of concrete. Weather resistant.

Use for:

- Driveways, sidewalks and patios
- Between concrete slabs and to separate slabs from structures

Meets the requirements of ASTM D 1751

Item No.	Package Size	Metric	Quantity
6917-03	½ in. x 4 in x 5 ft.	12.7 mm x 1.5 m	40/carton
6917-04	½ in. x 4 in x 10 ft.	12.7 mm x 3 m	40/carton




WALKMAKER BUILDING FORM - COUNTRY STONE PATTERN

Reusable plastic mold in cobblestone pattern. Fill the mold with 80 lbs. of Concrete Mix, trowel, and remove the mold. For best results, use QUIKRETE® Crack Resistant Concrete.

Use For:

- Creating cobblestone patterned paths, patios, courtyards, etc.
- Add color to concrete mix with QUIKRETE® Liquid Cement Color (No. 1317), available in Charcoal, Buff, Red, Brown, & Terra Cotta

Item No.	Package Size	Metric	Quantity
6921-32	2 ft. x 2 ft.	.6 m x .6 m	12/case



WALKMAKER BUILDING FORM -

- RUNNING BOND BRICK PATTERN
- EUROPEAN BLOCK PATTERN
- BASKET WEAVE PATTERN

Reusable plastic molds. Fill the mold with 80 lbs. of Concrete Mix, trowel, and remove the mold. For best results, use QUIKRETE® Crack Resistant Concrete.

Use For:

- Creating brick patterned paths, patios, courtyards, etc.
- Add color to concrete mix with QUIKRETE® Liquid Cement Color (No. 1317), available in Charcoal, Buff, Red, Brown, & Terra Cotta

Item No.	Package Size	Metric	Quantity
Brick Bond 6921-33	2 ft. x 2 ft.	.6 m x .6 m	12/case
Euro Block 6921-34	2 ft. x 2 ft.	.6 m x .6 m	12/case
Brick Weave 6921-35	2 ft. x 2 ft.	.6 m x .6 m	12/case



GUIDE TO CONCRETE BOOK

The QUIKRETE® GUIDE TO CONCRETE book provides practical instructions and clear step-by-step photos to help accomplish the most popular projects and repairs made with concrete, masonry and stucco products.

Other benefits and features include:

- Full color step-by-step project photography
- Detailed descriptions, quantity calculators and lists of tools and materials needed for projects
- At-a-glance project information
- Helpful hints & insight designed to make projects run smoothly from start to finish
- Free-standing counter display case

Item No.	Package Size	Quantity
6924-07	1 case	12/case





ROCK SALT - Graded Coarse Natural Salt

Use for:

- For melting ice and snow on stairs sidewalks, driveways, etc.

Item No.	Package Size	Metric	Quantity
9002-25	25 lb. bag	11.3 kg	100/pallet
9002-50	50 lb. bag	22.7 kg	56/pallet
9002-80	80 lb. bag	36.2 kg	30/pallet



ICE DEVIL & ICE DEVIL EF

Ice Devil®

- Melts ice down to -10° F (-23° C)
- Blended for quick melting results
- Residential & commercial use
- Contains MgCl and NaCl

Ice Devil® EF

- Melts ice down to 0° F (-18° C)
- Safer on landscaping
- Easier on concrete surfaces
- Contains KCL, liquid MgCL, & NaCl
- Contains color tracker
- Non-staining and non-tracking

**Can be used before or during ice and snow storms to prevent excessive bonding of ice and snow to concrete or pavement*

Available Regionally

Item No.	Package Size	Metric	Quantity
9004-80	50 lb. bag	22.7 kg	56/pallet
EF			
9004-79	25 lb. bag	11.3 kg	56/pallet
9004-83	50 lb. bag	22.7 kg	42/pallet



TRACTION SAND

A dry, coarse sand, ideal for traction on all surfaces in icy conditions.

Use For:

- Traction on icy and snow-covered surfaces
- Added vehicle weight

Item No.	Package Size	Metric	Quantity
1158-51	50 lb. bag	22.7 kg	56/pallet



TUBE SAND

Tube-shaped bag fits along side rear axle, above wheel wells or in bed of pick-up trucks.

Use For:

- Traction and vehicle weight for winter driving conditions
- UV resistant woven-poly bag

Item No.	Package Size	Metric	Quantity
1159-60	60 lb. bag	27.2 kg	42/pallet



The QUIKRETE® Companies continues to add manufacturing locations to better serve you with high performance products. With more than 100 locations throughout The United States, Puerto Rico, Canada, Central and South America, The QUIKRETE® Companies is unsurpassed in our ability to provide efficient and expedient delivery.

QUIKRETE
CEMENT & CONCRETE PRODUCTS™

What America's Made Of.®

The QUIKRETE® Companies
 3490 Piedmont Road, Suite 1300
 Atlanta, GA 30305

800.282.5828

www.QUIKRETE.com

6943-99 (11/14)